# 

## WIRELESS+

STUDIO SOUND, ANYWHERE

MSRP US\$800 | €800 | £700





Seamlessly bring your studio sound to where you're most creative. Portable studio monitors with powerful performance and accurate sound representation. Battery-powered and ultra-low latency wireless audio for a cable-free experience.




## Complete wireless freedom

Battery powered with 20H+ of playback time W+ Link ultra low latency wireless audio for music creation - only 16ms of latency, uncompressed audio and robust connection.



#### Portable studio sound

2 way active monitor featuring a 4 inch high-excursion woofer and 1 inch silk-dome tweeter Precision tonal accuracy over a flat +/-2dB frequency response from 50Hz to 20kHz Bass vent and boosting EQ tuned to provide a clean bass extension down to 40Hz

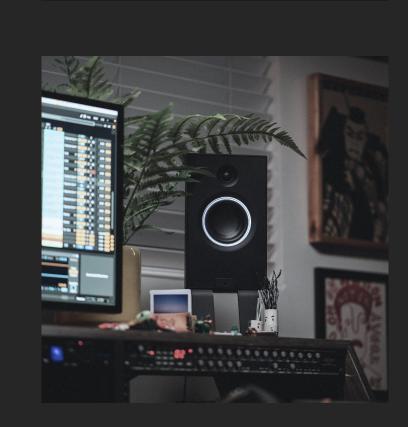


#### Sleek and robust design

Size and weight of only 3 litres / 2.5kg - Rear bass vent designed to be a comfortable carrying handle when on the move - Removable steel grille provides sturdy protection for the woofer and tweeter



## Connect to everything

W+ Link - use the XO2 transmitter for low latency wireless music creation
Bluetooth 5.2 - listen to music from your Bluetooth enabled devices
Cable - connect directly via 3.5mm mini-jack and 6.3mm balanced TRS inputs

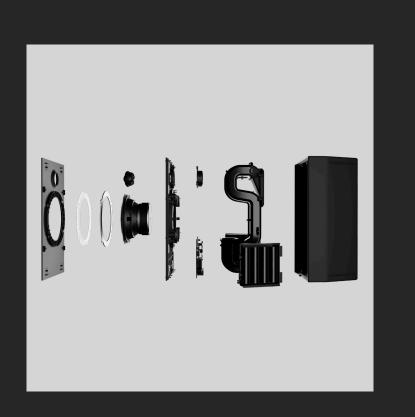

#### Responsible design

Main components produced from 100% recycled plastics, from post-consumer sources

Designed for disassembly in a glue-free design - take the whole speaker apart using two
screwdrivers. Replace worn out components including battery and drive units



• AIAIAI UNIT - 4 (PAIR)

#### What's included?



## **UNIT-4 WIRELESS+ - 2PCS**

Portable and ultra-low latency wireless studio monitors. Includes protective steel grills and power supplies with regional cord.


## X02 TRANSMITTER - 1PCS

USB-C W+ Link transmitter. Transmits to 2 x W+ Link devices simultaneously. Includes a 0,2m USB-C to USB-C cable in neon.

## PROTECTIVE POUCH - 2PCS

UNIT-4 protective pouch in black. Made from compostable fabric material.




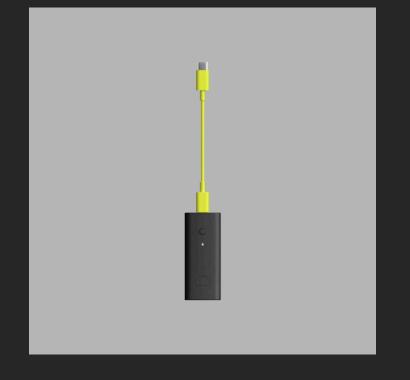

X02



POUCH

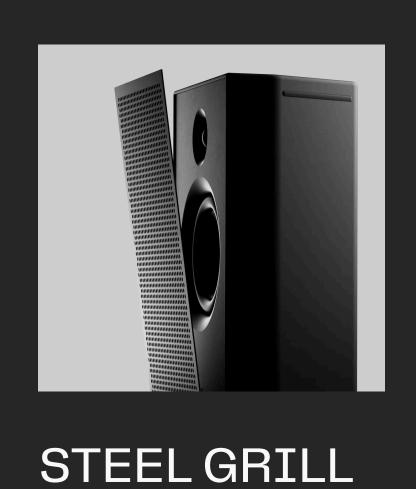

## Specifications

Freq. range

40Hz to 40kHz (-10dB)

Freq. response

50Hz to 20kHz (±2dB)

Peak SPL

105 dBSPL

Woofer

4-inch high excursion paper cone woofer

Tweeter

1-inch silk dome tweeter

Amplifier power

2 x 30W continuous, 2 x 80W peak

Charging time

2 hours

Playback time on battery

20 hours

W+ Link latency

16ms

W+ Link operating range (m)

12 meter

W+ Link audio quality

Uncompressed 44.1kHz 16-bit

Bluetooth version

5.2

Analog inputs

3.5mm mini-jack + 6.3mm TRS balanced

